


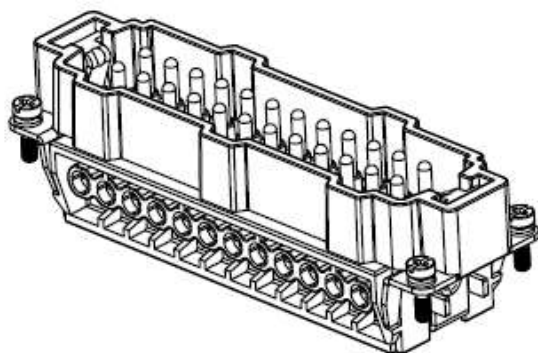


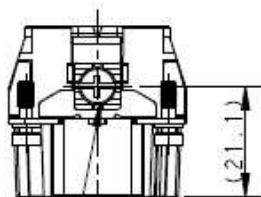


TYPE 1, T2040242101-000, WITH LOGO

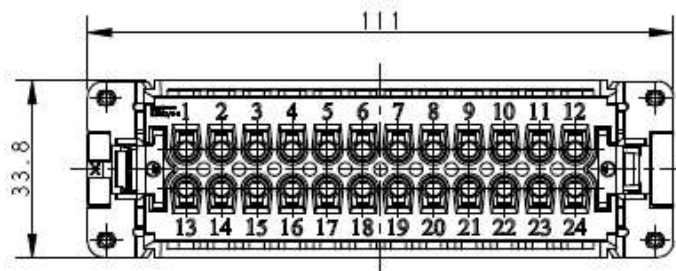


M4 SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2Nm

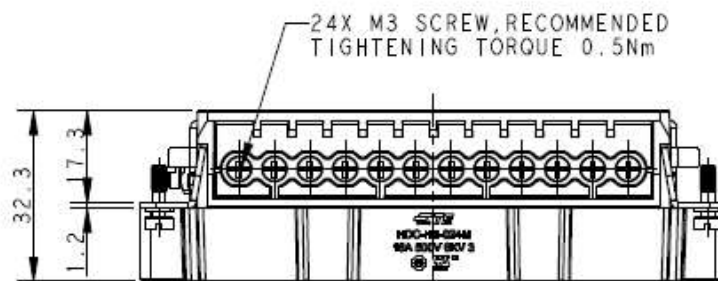

24X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm

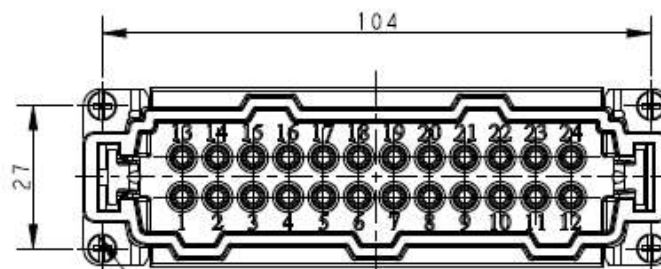

4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm

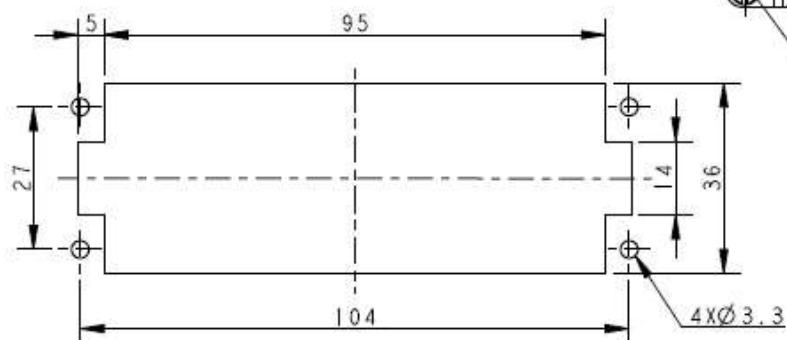

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

NOTES:

1. TECHNICAL CHARACTERISTICS:

INSULATION MATERIAL: PC

RATED VOLTAGE: 500V

RATED CURRENT: 16A

INSULATION RESISTANCE: $\geq 400M\Omega$

RATED IMPULSE VOLTAGE: 6KV

POLLUTION DEGREE: 3


FLAMMABILITY: UL94V-0

MATING CYCLES: 500 CYCLES


WIRE RANGE: $0.5mm^2 \sim 2.5mm^2$ (AWG20-AWG14)

CONTACT TYPE: SCREW CLAMP (M3)




HE-024-M

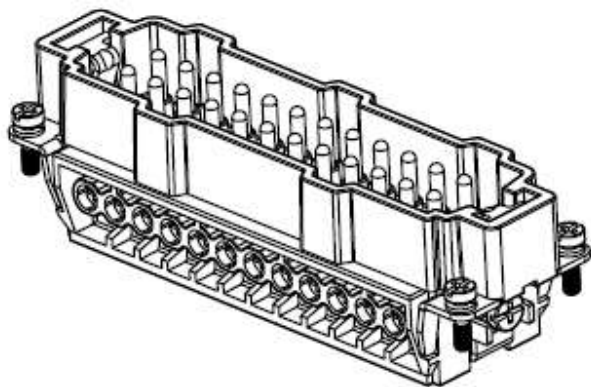

TYPE 2, T2040242101-001, WITHOUT LOGO

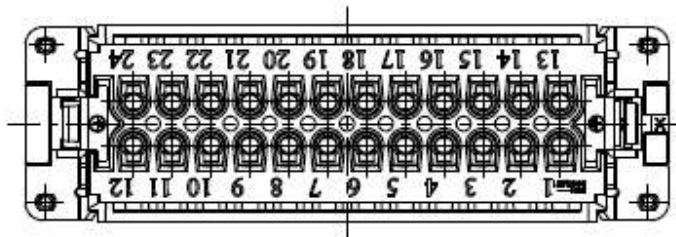

NOTE:
ALL SPEC REFER TO TYPE 1

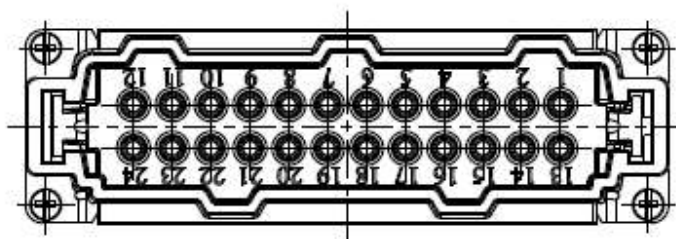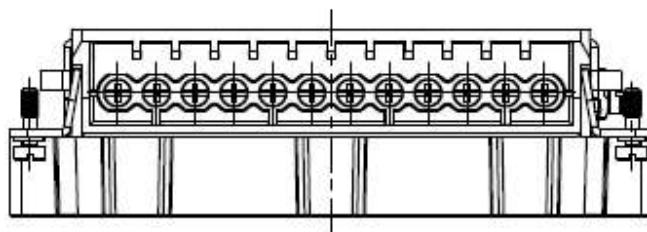

HE-024-M